

# CR200

With the CR200, Cornelius introduces a very powerful machine into the beer cooler sector. With its large ice bank and long cooling coils, the CR200 benefits from the proven energy efficient technology developed in our Post-Mix cooler range. Incorporating the Cornelius patented technology into the design enables the CR200 to deliver outstanding performance with significantly reduced energy consumption over conventional beer coolers which also helps the environment. The CR200 is designed and built to a robust standard and provides easy access to all serviceable parts. It is equipped with ergonomic handles as well as roller castors for easy handling and is therefore easy to move even for an individual.


## Key features

- High level cooling performance
- High quality build standard with a stainless steel casing
- Equipped with roller castors for easy movement
- Service friendly



All information contained in this document is the property of IMI Cornelius and should not be passed to any third party without prior written consent.

© IMI Cornelius

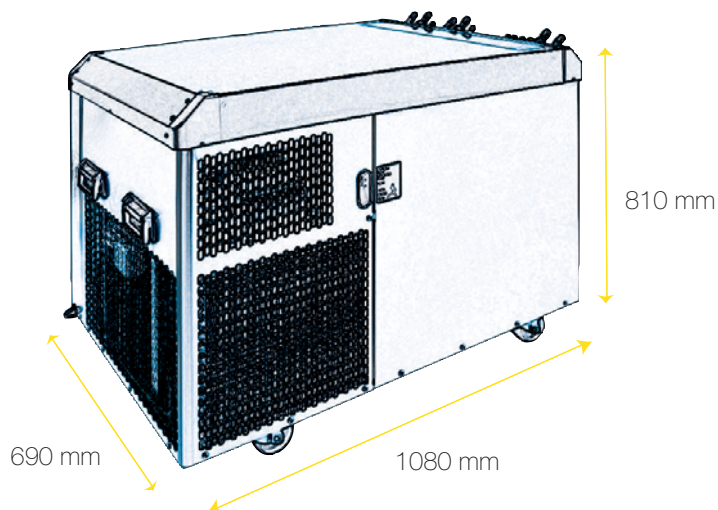

### Performance

Dispense capacity in l/hour  
continuously with a DeltaT  
of 10 °C (18 to 8 °C): 183 litres

### Maximum performance

Dispense capacity in l/hour  
with a DeltaT  
of 10 °C (18 to 8 °C): 579 litres  
of 16 °C (24 to 8 °C): 360 litres

### Refrigeration

Compressor power: 1437 watt/ 1 hp  
Cooling performance continuously: 1308 watt  
Ice bank weight: 53 kg  
Ice bank capacity: 4240 kcal  
Initial pull down time: 227 min  
Water bath capacity: 150 litres

### Cooling coils

Material: Stainless steel

### Dimension

Height: 810 mm  
Width: 690 mm  
Depth: 1080 mm

Maximum ambient temperature: 32 °C

### Heat emission

In the working area: 3400 watt

### Electrical

Supply voltage: 230 V / 50 Hz  
Power consumption: 1700 watt  
Supply: 2 m mains cable  
euro style plug

### Gewicht

Dry weight: 95 kg  
Shipping weight: 110 kg

### Variations and order numbers CR200

CR200 UCC 4 x 10 mm 22 1000 950

Cooling performance and dispensing capacities at an ambient  
temperature of 24°C. 18°C beer ingoing temperature and dispense  
temperature not exceeding 8°C.

IMI Cornelius reserves the right to modify the details in the publication as  
products and specifications are updated and improved. All data contained  
in this literature is correct at time of print. To ensure technical data is accurate  
please contact IMI Cornelius prior to placing your order



### United Kingdom

T: +44 (0) 870 905 0773  
F: +44 (0) 1142 320 067  
E: customerservice@corneliusuk.com  
www.corneliusuk.com

### Germany

T: +49 (0) 2173 793 0  
F: +49 (0) 2173 774 38  
E: info@imi-cornelius.de  
www.imi-cornelius.com

