

Triton2500

The Triton2500 from Cornelius is a cooler circuit carbonator for use in a postmix system. With our innovative cooling technology and proven competence the Triton2500 features the following strengths:


- Excellent build quality and highly efficient operation
- Special features designed to prolong the life time of the unit
- Small footprint
- All lines are made of stainless steel
- Easy-care housing made of stainless steel
- Use of standardized parts

Key features

- Cold carbonation for a high CO₂ volume
- Quick access to all service-relevant parts
- Large ice bank to cover dispensing peaks
- 3-pin ice bank electrode ensures ice bank stability and reduces compressor starts



All information contained in this document is the property of Cornelius and should not be passed to any third party without prior written consent.

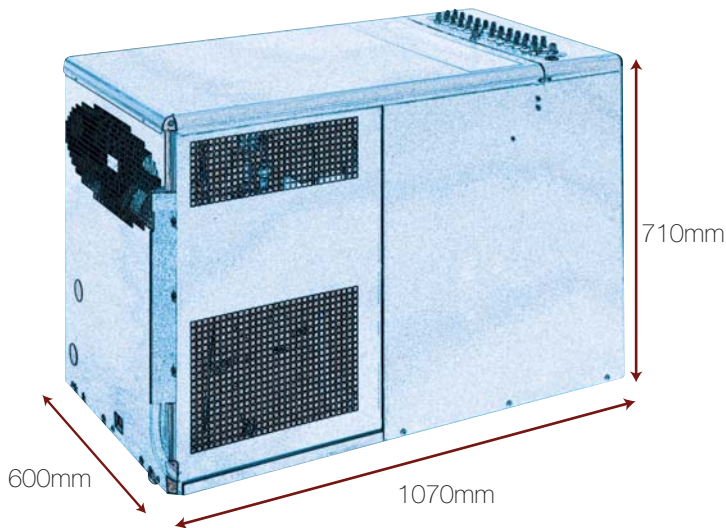

Performance:

24°C ambient, 20°C DeltaT
Dispense capacity - drinks
@ 0.3 l continuously per hour: 200 drinks

Maximum performance:

24°C ambient, 20°C DeltaT
Drinks @ 0.3 l
4 x 0.3 l of drinks per minute: 932 drinks

Maximum ambient temperature: 32°C

Weight:

Equipment weight: 102 kg
Packed weight: 105 kg

Electrical:

Mains supply: 230 v / 50 hz
Optionally: 220 v / 60 hz
Power consumption: 1550 watts
Supply: 2 m mains cable
euro style plug

Refrigeration:

Compressor: 34 cc / 1 hp
Compressor duty: 1370 watts
Water bath capacity: 125 litres
Ice bank weight: 55 kg
Ice bank production: 240 minutes
Ice bank capacity: 4400 kcal
Evaporator type: Stainless steel
Condenser type: Air cooled
Refrigerant type: R134a

Carbonator pump:

Performance in l / h at 10 bar: 2 x 280

Recirculation pump:

Performance in l / h at 2 bar: 320

Control type:

Electronic ice bank

Heat emission:

3300 watts

Product coils:

Material: Stainless steel
Number of coils: 13
Syrup: 10 (ID 7 mm; 1/2" BSF)
Premix: 1 (ID 7 mm; 1/2" BSF)
Still water: 1 (ID 10 mm; 5/8" UNF)
Soda water: 1 (ID 10 mm; 5/8" UNF)
Diameter (internal/external): 7 mm and 10 mm
Connection: Generally 1/2" BSF except still, soda water and water entrance 5/8" UNF

Variations and order numbers Triton700

With 2 brass carbonator pumps
and one stainless steel recirculation pump **49 1593 108**

Satellite version **49 1593 125**

With still water control,
Air cooled with
2 soda water recirculation pumps **49 1593 109**

With electronic still water control,
Water cooled **49 1593 127**

220 v / 60 hz version **on request**

Cornelius reserves the right to modify the details in the publication as products and specifications are updated and improved. All data contained in this literature is correct at time of print. To ensure technical data is accurate please contact Cornelius prior to placing your order.

