





FEATURES

Merchandising

Large and interchangeable LED illuminated graphic for maximum impact. LED lit flavour cards for brand visibility.

Ease of service

Independent refrigeration deck for easy service and maintenance. Structure design allows quick access to key components.

Excellent performance

Optimized ice bank and product delivery system ensuring in-spec drink dispense even in Very High Ambient environment.

Life cost savings

Optimum air flow control, increased insulation, efficient heat exchange, external removable condenser filter, LED illumination, R290 green refrigerant all contribute to energy efficiency and prolonged component lifetime.


Beverage flexibility

Quick hand operated changeover manifold without need for tools and plumbing.

Reliability & Sustainability

R290 green refrigerant and global agency (GB, CE, ETL Sanitation)



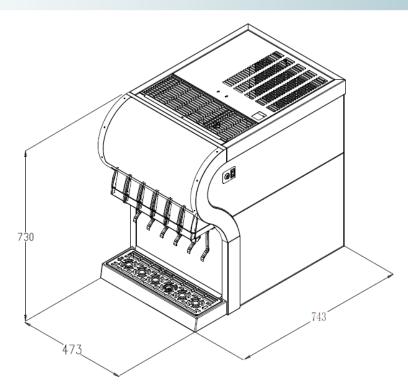

TECHNICAL SPECIFICATIONS

TYPE OF VALVES SFV ELECTRICAL REQUIREMENTS 230V/50Hz

NUMBER OF VALVES 6

CUP CLEARANCE 250mm

Housing Material Painting Steel

CONTINOUS DRAW CAPACITY at 12oz, 2 drinks/m

@105°F (40.6°C) 75%RH 63cups
@90°F (32.2°C) 65%RH 126cups Coil Material

@75°F (23.9°C) 45%RH 277cups

COMPRESSOR SIZE 1/3+HP DIMENSIONS (mm) 730(H)*473(W)*743(D)

REFRIGERANT R290
WATER BATH SIZE 48L PRODUCT WEIGHT 80KG

WATER BATH SIZE 48L PRODUCT WEIGHT
ICE BANK 12KG



SS 304

Website: www.cornelius.com