



Blu CE_4

Post-Mix drink dispenser

Specification Sheet



Features

Big ice bank weight for compact profile, meet customer conditions

Separately refrigeration deck, fan and agitator modular

Large LED illuminated graphic for maximum branding impact

New water level sensor design to increase the

No side louvers, no constraints on setting equipment side by side

Easier & quicker CSD/NCB conversion

External removable condenser filter

With rat guard design





Blu CE_4

Post-Mix drink dispenser

Specification Sheet

Technical Specification

Electrical	230V 50Hz, 220V 60Hz
Refrigerant	R134a
Ice Bank Size	16.5 lbs./7.5Kg
Compressor Size	1/4HP
Operating Conditions	50°F to 90°F (10° C to 32.2°C)
Dispenser Dimensions	13.8' W x 25.6' D x 26.8'H W350mm x D650mm x H680mm
Recommended Clearance	Top: 18.0'(45 cm) Back: 6.0'(15.2 cm) and Sides: 6.0'(15.2 cm)
Weight	Operating: 200 lbs(94 kg) Shipping: 132.3 lbs. (60 kg)
Continuous Draw capacity @2drinks per minutes@12oz	
@105°F(40.6°C)65%RH	N/A
@90°F(32.2°C)65%RH	60drinks
@75°F(24°C)75%RH	110drinks
Water Bath Size	36L
Water Connection	3/8" SAE male flare fitting on dispenser
Water Supply Requirements	Optimum Pressure: 30psi (2.04 bar)flowing 3oz/sec Minimum Static Pressure: 20psi (1.36 bar) Maximum Static Pressure: 35psi (2.38 bar)
	For water pressure exceeding the optimum supply specification, flow control set at 50psi is recommended
Flow Rate	Beverage pour rate 1.5-3oz/sec
Agency Listing	

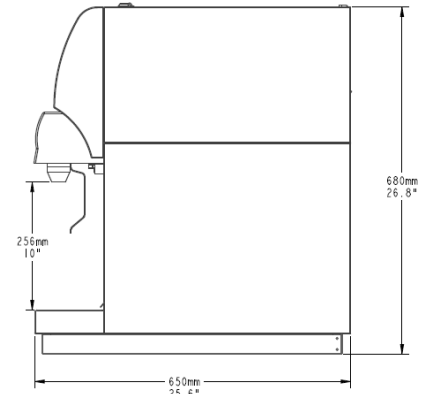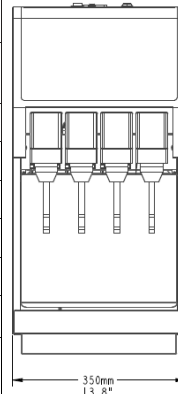

Item Number	Item Description
891561101P	Blu-CE_4 230/50 2CSD+1NCB+1Flex UF1 Pepsi CHN
8915611102	Blu-CE_4 230/50 2CSD+1NCB+1Flex UF1 PC KFC CHN
8915611106	Blu-CE_4 230/50 3CSD+1Flex UFB EU Plug Uzbekstan
8915611108	Blu-CE_4 230/50 2CSD+1NCB+1Flex UFB US Plug Thailand
8915611109	Blu-CE_4 230/50 3CSD+1Flex UFB PC EU Plug Uzbekstan
8915621105	Blu-CE_4 230/50 3CSD+1Flex UF1 SL EU Plug Korea
8915611103	Blu_CE-4230/50 ALL CSD UF1 UF1 UK plug
8915612102	Titan_4 230503CSD+1NCB SFV US Plug
8915611104	Blu_CE-4230/50 ALL CSD UF1 UF1
8915613201	Blu-CE_2 230/50 2CSD UF1 US Plug Thailand
8915621101	Blu-CE_4 230/60 UFB SL 3+1
8915641101	BLu-CE_4HC 23050hz _UF1_3+1

To learn more and see **Blu CE_4** in action, visit cornelius.com
 To contact us directly, go to cornelius.com/contact-us